
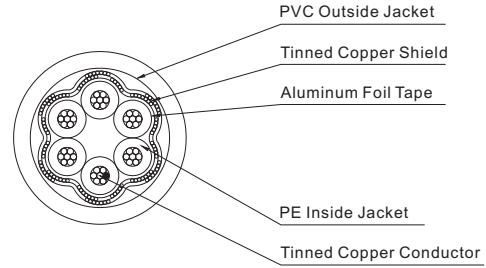


# CB6

## Load Cell Cable


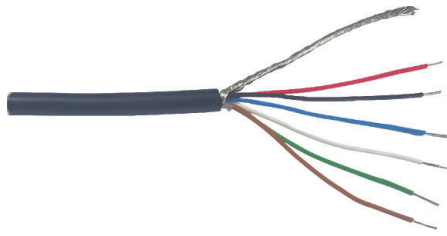


SPECIFICATIONS	
Temperature	-30°C to 85°C / -22°F to 185°F
Wire Resistance	≤ 0.09Ω/m
Screen	1
Capacity	≤ 80PF/m
Length	100m (loose) / 300m (with reel)

PART NUMBER	Wire	Outside Diameter	Cross Section Area	AWG	Length	With Reel	Self Weight (approx)	
							KG	LB
CB6-7.6-100m	6 wire	7.6mm±0.2	0.314mm²/wire	22	100m (328ft)	no	7.4	16.3
CB6-7.6-500ft					yes	11.9	26.2	
CB6-7.6-300m					yes	22.8	50.2	

# CB6RP

## Load Cell Cable

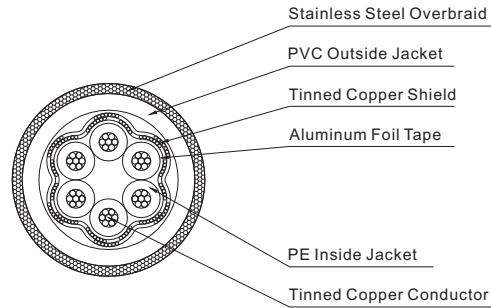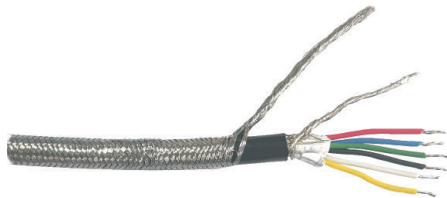

SPECIFICATIONS	
Temperature	-30°C to 85°C / -22°F to 185°F
Wire Resistance	≤ 0.09Ω/m
Screen	1
Capacity	≤ 80PF/m
Length	100m (loose) / 300m (with reel)

PART NUMBER	Wire	Outside Diameter	Cross Section Area	AWG	Length	With Reel	Self Weight (approx)	
							KG	LB
CB6RP-8-100m	6 wire	8.0mm±0.3	0.314mm²/wire	22	100m (328ft)	yes	10.5	23.1