
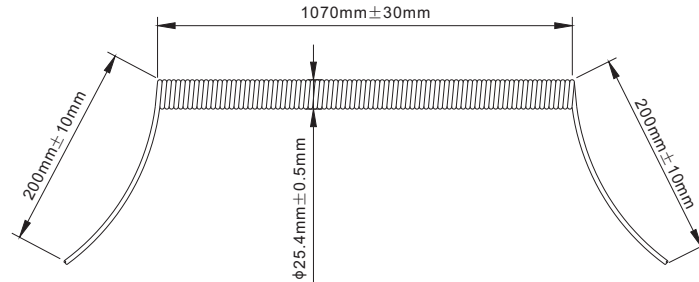


## Load Cell Cable

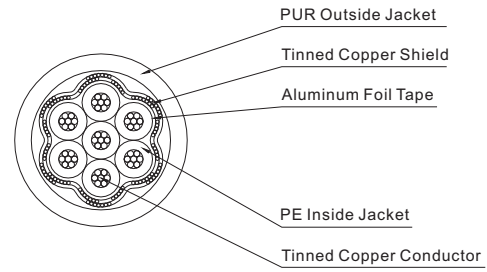

SPECIFICATIONS	
Model	CB7AP
Number of Wires	7
Outside Diameter	7mm ± 0.2
Cross Section Area of Each Wire	0.149mm <sup>2</sup>
AWG	32
Temperature	-30°C to 85°C / -22°F to 185°F
Wire Resistance	≤ 0.09Ω/m
Screen	1
Capacity	≤ 80PF/m
Length	9m
Inner Shield	Tinned copper braided screen & aluminum foil-polyester tape
Outer Shield	Stainless steel braided screen
Jacket Material	PU
Jacket Colour	Black

PART NUMBER						
Description	With Reel	With Inner shield	With Outer shield	Diameter	Part No.	Weight (kg) Approx.
PU cable with 7 wire .....	No .....	Yes .....	No .....	φ 7.0 .....	CB7AP-7-9m .....	0.7

CABLE, CONNECTOR & ACCESSORIES