


J04ES; J04SS

Stainless Steel



Features:

- Enclosure Material: Stainless steel SS304
- Number of cells: 2 - 4 single cells
- Trimming: Individual cell with excitation or signal trim
- Equipped with independent potentiometers
- Captive stainless steel screws
- IP Rating: IP65

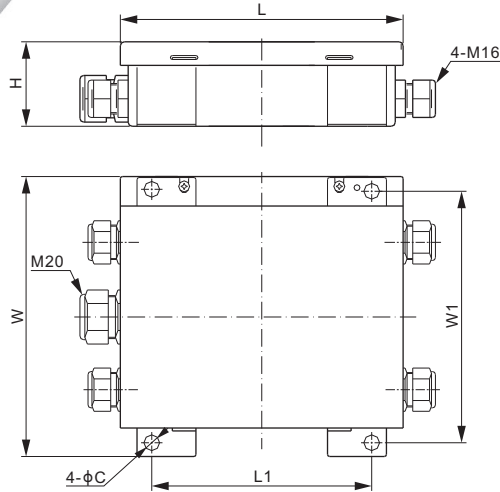

DIMENSIONS

	C	H	L	L1	W	W1
mm	8	44	144	112	142	128
inches	0.3	1.7	5.7	4.4	5.6	5.0

SPECIFICATIONS

Number of Cells	2 - 4 single cells	Trimming	Individual cell with excitation or signal trim
Input Cable Fittings	M16: 4mm - 8mm diameter cable	Enclosure Material	Stainless steel SS304
Output Cable Fittings	M20: 5mm - 9mm diameter cable	IP Rating	IP65

TRIMMING RANGE

Load Cell Resistance	Signal Trim	Excitation Trim
350Ω3.6% of output2.3% of output
700Ω6.3% of output1.3% of output
1000Ω7.0% of output1.0% of output

PART NUMBER*

Trimming	Lightning Protection	Part No.	Weight (kg) Approx.
Excitation.....No	J04ES.....	0.7
Signal.....No	J04SS.....	0.7
Excitation.....Yes	J04ES-II.....	0.7
Signal.....Yes	J04SS-II.....	0.7

* ATEX, FM, IECEx approved versions carry the "-Ex" suffix.

MOTHERBOARD LAYOUT

